

CHARACTERISTICS

- Standard (Polyamide 6.6), to cover most indoor applications
- Several lengths and 6 typical widths with a tensile strength up to 250lbs (114kg), to cover the most demanding applications
- Packaging: OEM bulk quantities in recyclable polythene bags
- Also available in small bags with Euroslot and in workbench boxes




TECHNICAL INFORMATION



Material: UL approved Polyamide 6.6
Temperature range: -20°C to +85°C (-4°F to 185°F)
Minimum installation temp: -20°C (-4°F)
Color: Natural and black
Flammability rating: UL 94 V-2
Other properties: Halogen free
Proposition 65: All sizes of cable ties meet Prop 65 requirements

Product Code	Length		Width		Max Bundle		Min. Tensile Strength		Pack Quantity
	[mm]	[in]	[mm]	[in]	[mm]	[in]	[kgs]	[lbs]	[pcs]
XCT7BL/XCT7N	190	7.5	4.8	0.19	46	1.8	22.2	50	100/1000
XCT11BL/XCT11N	280	11.0	4.8	0.19	70	2.8	22.2	50	100/1000
XCT36BL/XCT36N	920	36.2	9.0	0.35	263	10.4	79.4	175	50/100
XCT48BL/XCT48N	1220	48.0	9.0	0.35	365	14.4	79.4	175	50/100

PACKAGING

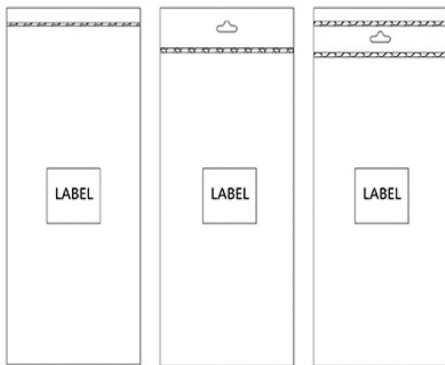

Standard Euroslot with single-line Euroslot with double-line

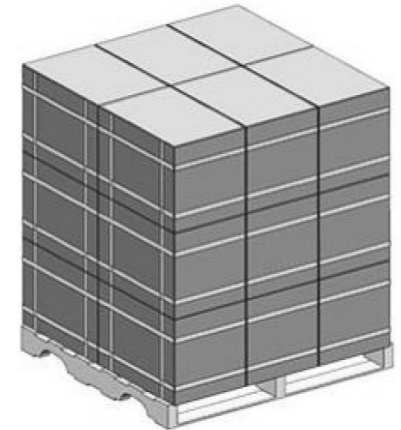

Inner Bag:

- 1: Standard
- 2: Euroslot with single-line
- 3: Euroslot with double-line

Carton Size (L x W x H):

40.2in x 8in x 4.7in
 1020mm x 200mm x 120mm

Pallet Size - Loaded (L x W x H):

48in x 40in x 4.75in
 1219mm x 1016mm x 1475mm